

# PROSIGNIA VS

System Boards	Assembly	Spare Part
486DX/33 SCSI, ENET	003513	199124-001
486DX2/66 SCSI, ENET	003537	199125-001
486SX/33 SCSI, ENET	003535	199126-001
486DX/33 SCSI, TR	003742	199172-001
486DX2/66 SCSI, TR	003694	199120-001
256K Cache Board W/O Bracket	003560	194380-001

## System Board (003513, 003537, 003535, 003742, 003694)

SW2	System Board SW2 Maintenance Settings	Position	Status
S1	VIDEO DISABLE: This switch is ignored and the integrated video is disabled if ROM detects an installed optional video board.	OFF*	ENABLED
S2	CONFIGURATION LOCK: System configuration cannot be changed when this switch is enabled	OFF*	DISABLED
S3	RESERVED	ON	ENABLED
S4	DISKETTE BOOT ENABLE: System can be booted from diskette drive no matter what configuration reads when this S4 is enabled (on)	OFF*	DISABLED
S5	POWER-ON PASSWORD DEFEAT: Password is set during configuration.	ON	ENABLED
S6	NV RAM: Invalidates nonvolatile RAM and configuration is cleared when S6 is on.	OFF*	DISABLED
		ON	ENABLED

\* Default.

## System Board (003513, 003537, 003535, 003742, 003694)

SW1 Settings, Processor Select	S1	S2	S3
486SX/33	OFF	OFF	OFF
486DX/33 or 486DX2/66	ON	OFF	ON
OverDrive Processor*	OFF	ON	ON

\* When available.

Microprocessors	Spare Part
486DX/33 processor	194495-001
486SX/33 processor	197489-001
486DX2/66 processor	197422-001

Memory Modules	Speed	Spare Part
4-MB Memory Module	80 ns	118741-001
8-MB Memory Module	80 ns	128954-001
16-MB Memory Module	80 ns	139143-001
32-MB Memory Module	80 ns	139949-001
4-MB Memory Module	70 ns	141754-001
8-MB Memory Module	70 ns	141755-001
16-MB Memory Module	70 ns	149947-001
32-MB Memory Module	70 ns	149948-001

Cache Bracket	Spare Part
Cache Bracket	199135-001

# PROSIGNIA VS

<b>Controller Boards</b>	<b>Assembly</b>	<b>Spare Part</b>
SMART Controller	002969	142130-001
	003596	181132-001
Fast SCSI-2 Controller	002682	142040-001
Fast-Wide SCSI-2/E Controller	003529	199634-001
NetFlex Controller	002709	142041-001
NetFlex Controller Token Ring Module	142035	142042-001
NetFlex-2 ENET-TR Controller	003382	142222-001
NetFlex-2 DualPort ENET Controller	003101	142151-001
NetFlex-2 TR Controller	003647	199521-001
NetFlex-2 DualPort TR Controller	003104	142195-001
NetFlex-3/E Controller	004162	169801-001
NetFlex-3/P Controller	004165	169811-001
NetFlex-3 100 Base-TX Upgrade Module	004183	169805-001
NetFlex-3 100 VG-AnyLAN Upgrade Module	004189	169803-001

<b>Miscellaneous</b>	<b>Assembly</b>	<b>Spare Part</b>
Serial/Parallel Interface Board *	000990	106886-001
SpeedPaq 144/I Data and Fax Modem **	003002	147453-001

\* See Volume 2 Appendix, Multiproduct Boards, for settings.

\*\* See Volume 2 Appendix, Modem Configuration Information.

<b>Hard Drives</b>	<b>Spare Part</b>
535 MB Fast-SCSI-2	137730-001
1.05 GB Fast-SCSI-2	142039-001
2.1 GB Fast-SCSI-2	142272-001
4.3 GB Fast-SCSI-2	199585-001

<b>Tape Drives</b>	<b>Spare Part</b>	<b>Tape Cartridge</b>	<b>Spare Part</b>
525-MB ACA	142073-001	525 MB QIC Cartridge	119504-001
1.2 GB Tape Drive	199615-001	1.2 GB QIC Cartridge	199625-001
2/8-GB DAT	142074-001	1.3 GB 60M DDS1	131167-001
		2.0 GB 90M DDS1	131148-001
		DAT Cleaning Cartridge	131194-001
4-/16-GB TurboDAT	199464-001	4.0 GB 120M DDS2	199496-001
TurboDAT Autoloader	199466-001	4 Cartridge Magazine	199467-001
		12 Cartridge Magazine	199468-001
10/20 Table Top DLT	199676-001	10/20 GB Data Cartridge	199703-001
		DLT Cleaning Cartridge	199705-001
15/30 Table Top DLT	242469-001	15/30 GB Data Cartridge	242467-001
		DLT Cleaning Cartridge	199705-001

<b>Diskette Drives</b>	<b>Spare Part</b>
1.44 MB 3-mode w/bracket	197006-001
1.44 MB, 2-mode, 3.5", one-third height, w/bracket	112565-001
1.2 MB	112566-001

# PROSIGNIA VS

<b>CD-ROM Drives</b>	<b>Spare Part</b>
Tray Load CD-ROM (internal)	142223-001
Tray Load CD-ROM (external)	199430-001

<b>Cables</b>	<b>Spare Part</b>
LED	197832-001
Internal SCSI Hard Drive	194488-001
Diskette Cable (2-mode)	194489-001
Diskette Cable (3-mode)	148217-001
External SCSI Signal (6')	146776-001
External 100-pin to 50-pin	142159-001
Loopback Cable (2 ch NIC)	142254-001
Loopback Cable (NetFlex)	142054-001
2-channel Ethernet "Y"	197134-001
DLT, 6', Standard to Centronix	199714-001
DLT, 6', Wide to Centronix	199780-001
DLT, 18", Daisy Chain (Table Top)	199713-001
DLT Active Terminator	199715-001
50-pin to 68-pin Adapter	189638-001

<b>SCSI ID Jumper Settings</b>	<b>Drive Bay</b>	<b>Pin 3 ID2</b>	<b>Pin 2 ID1</b>	<b>Pin 1 ID0</b>
3	3	OFF	ON	ON
2	2	OFF	ON	OFF
1	1	OFF	OFF	ON
0	0	OFF	OFF	OFF

**IMPORTANT:** No two drives can have the same SCSI ID.

<b>ROM Information</b>	<b>Spare Part</b>
System ROMPaq	143198-001
Option ROMPaq	142207-001


<b>Power Supply/Battery</b>	<b>Spare Part</b>
Power Supply 200W	197416-001
Battery	160274-001

# PROSIGNIA VS

## MEMORY UPGRADE CHART

PROCESSOR BOARD

(8 MB)

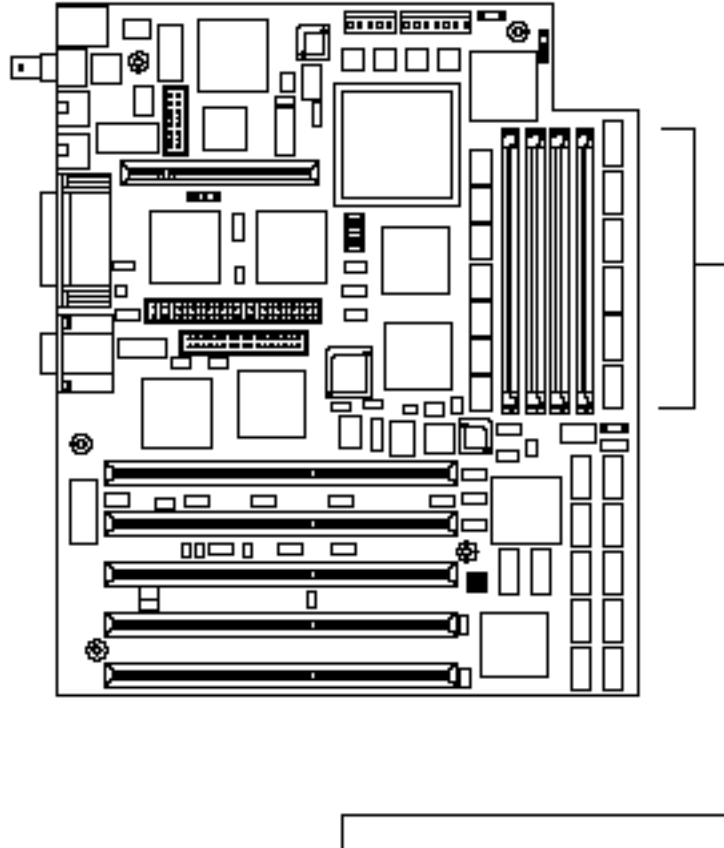

ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES,  
UP TO 128 MEGABYTES TOTAL SYSTEM MEMORY

4-MB 70ns - OPTION PN 141684-001  
4-MB 80ns - OPTION PN 118690-001

8-MB 70ns - OPTION PN 141685-001  
8-MB 80ns - OPTION PN 128877-001

16-MB 70ns - OPTION PN 190747-001  
16-MB 80ns - OPTION PN 149320-001

32-MB 70ns - OPTION PN 190748-001  
32-MB 80ns - OPTION PN 149147-001